


LP Morgan **Security Cage** user manual

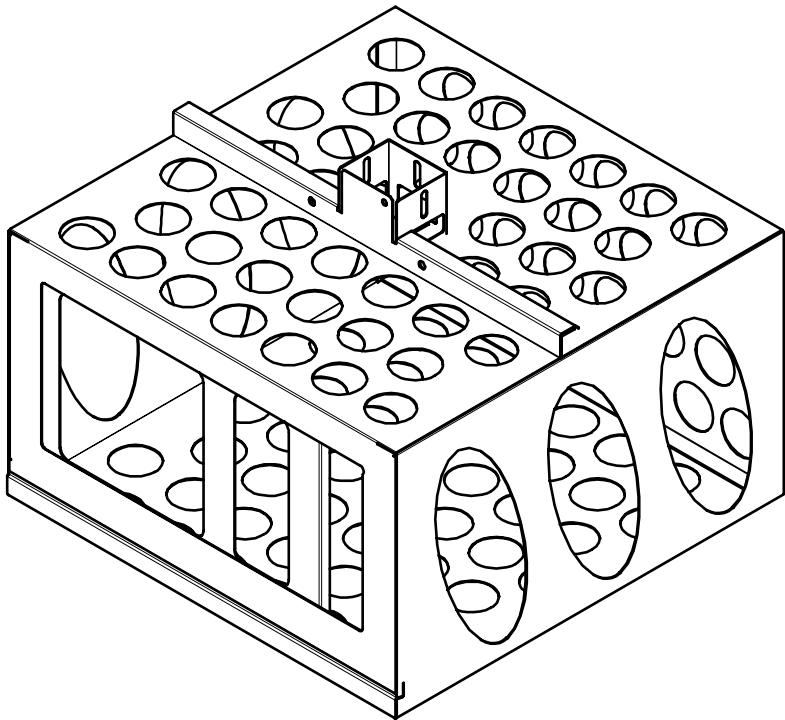

LP Morgan Security Cage Installation/Operation Instructions

To the owner

Congratulations on purchasing an LP Morgan Security Cage. This innovative projector safe gives you maximum protection and security.

Please take a moment to review this manual, as it will ensure you many years of trouble-free service from your new Security Cage.

LP Morgan Security Cage Installation/Operation Instructions


Please read this instruction manual before installing

The LPM Security Cage is designed for installation with, or retrofitted to the standard range of LPMorgan Skyhook 500, 1000 and 1500 .
(It cannot be used with the LP Morgan Direct to Ceiling fitting)

LP Morgan Security Cage

The Security Cage consists of three parts:

- Security Cage hinged body
- Lens Plate
- Extended U-Hook with Extra Long Heavy Duty Arms (partially assembled)

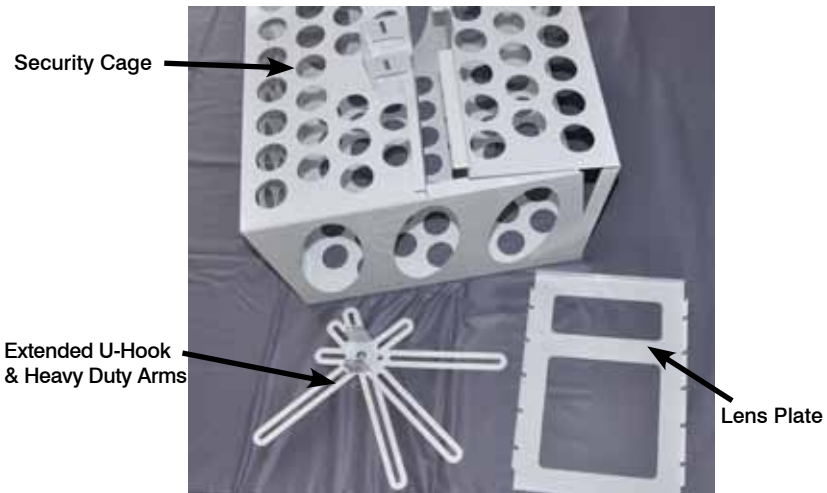

LP Morgan Security Cage Installation/Operation Instructions

After unpacking the Security Cage locate the Extended U-Hook and Arms for mounting your projector.

Note: Follow the “Skyhook Instruction Manual” for instruction on “Attaching the Skyhook”


Disassemble the installed or supplied Skyhook, to enable replacement of the existing U-Hook projector mount.

Once the post assembly is attached to the ceiling, mount the replacement Extended U-Hook and Heavy-Duty arm assembly to the Skyhook.

Note: Follow the “Skyhook Instruction manual” for instruction on “Attaching the Projector”

The Security Cage slot at the top locates on the nicks in the Skyhook Extended U-Hook bracket.

If required the projector adjustments can be made and fixed before adding the Security Cage to the U-Hook.



Attach Skyhook



Attach Projector



Insert the Lens Plate into the channel on the hinged panel.

Position the Lens Plate to the right, left or centre to align with the lens position of the projector.

The Lens Plate can be inverted to suit positioning and locates into channel-locating pins.



LP Morgan Security Cage Installation/Operation Instructions

Flip Security Cage closed and secure with padlock (not supplied).



Padlock secured detail
(Padlock not supplied)



Further tilt adjustments can be made with access to most screws after padlocking the Security Cage.



Warranty Information

Please fill out the online warranty form, or the warranty card included with the product and post it back to Herma at the reply paid address on the back cover.

The warranty covers defects in workmanship and materials, provided this product has been installed in a normal environment and maintained according to the written instructions. Herma warrants the product against loss of usefulness, discolouration or deterioration of optical quality within the warranty period as a result of manufacturing or material defects. This warranty applies only within Australia.

Conditions

All costs related to installation and re-installation of the Herma equipment covered by this warranty are not the responsibility of Herma Technologies.

Herma will not be responsible for any consequential damages or costs resulting from, during or following installation procedures.

Herma will repair or replace, with the least possible delay, any defective equipment. Any equipment replaced pursuant to the terms of this warranty shall be retained by Herma.

The user is responsible for any freight costs relating to repair or replacement.

The Product must be returned to Herma in suitable packing to prevent damage in transit. Herma will not accept any responsibility for damage to the equipment caused by inadequate or unsuitable packing, or for any damage howsoever caused whilst the goods are in transit.

Herma Technologies shall not be liable for any injury, loss or damage, direct or consequential, arising out of the use of, misuse of, or inability to use, the equipment.

The warranty does not cover any equipment, which has been subjected to misuse, abuse, neglect, accident or intentional damage, improper voltage or any alteration which affects the reliability or performance of the equipment not attributable to faulty manufacture, parts or labour and without limiting the generality of the foregoing.

This warranty does not cover any equipment where usage, adaptation or installation (including wiring of electrical connections) are not in accordance with our written installation and operating instructions.

Warranty Period:

1 year from date of installation, not to exceed 15 months from date of invoice.

Visit www.lpmorgan.com.au/pgs/products/warranty.html for other info

Information in this document is subject to change without notice.

© Herma Technologies. All rights reserved.

This document is protected against unauthorised copying electronic or otherwise.

Trademarks used in this text: Herma, the Herma Logo,,LP Morgan and LP Morgan logo are registered trademarks of Herma Technologies.

Other trademarks and trade names used in this document remain the property of the relevant owners.

Your LP Morgan Retailer is able to provide
more information on our products.

Or visit www.lpmorgan.com.au

Factory 4a, 6 Albert Street Preston Vic 3072

Phone: +61 3 9480 6233 **Fax:** +61 3 9480 6533

Email: info@herma.com.au www.lpmorgan.com.au

February 2010 v1.0

